

We have one goal — improving the noise and vibration quality of our customers' products. Roush delivers innovative, effective noise and vibration control products and solutions. By combining advanced analysis capabilities, comprehensive engineering services, and state-of-the-art facilities, Roush has become a proven partner in identifying and resolving challenging noise and vibration issues. Backed by the diverse capabilities of the Roush family of companies, we are uniquely equipped to provide turnkey noise and vibration solutions.

Roush... your silent partner in developing smoother, quieter products.

Damping Foam — RA260-XM

Product Description

RA260-XM is closed-cell foam specifically formulated for sophisticated industrial and automotive applications. RA260-XM medium density foam exhibits very good dimensional stability, cushioning properties and vibration damping qualities.

Features

RA260-XM is an excellent product for isolation and damping over a broad temperature range. It is totally unaffected by harsh chemicals such as gasoline, oil, hydraulic fluid, brake fluid, alcohol, and anti-freeze, as well as sulfuric acid, nitric acid, and even hydrochloric acid. It does not become brittle or exhibit loss of properties over time and temperature exposure. It is also UV and oxidation resistant.

Design and Manufacturing

RA260-XM is available in 0.063" – 0.500" thicknesses at various widths and lengths.

Typical Physical Properties

Material Type	Polyester Blend Foam
Density (ASTM D-1667)	15 lb/ft ³
Hardness (Shore 00) (ASTM D-2240)	37
Compression Deflection @ 25% (ASTM D-1056)	7 psi
Compression Set @ 50% (ASTM D-1056)	12%
Water Absorption (ASTM D-1056)	12%
Tensile Strength (ASTM D-412)	130 psi
Percent Elongation (ASTM D-1056)	265
Recommended Service Temperature	-40 to 250°F
Recommended Application Temperature	50 to 110°F
Fungi Resistance/Oxidation Resistance/Weather Resistance.....	Excellent





NOISE AND
VIBRATION
CONTROL
PRODUCTS


ROUSH

12011 Market St.
Livonia, MI 48150
Phone: 734-779-7003 or
800-215-9658
Fax: 734-779-7903
E-mail:
sales@roushind.com


www.roushind.com/nvh

RA260-XM — Dynamic Material Properties (Shear Resonance Test Results)

Loss Factor Property Map

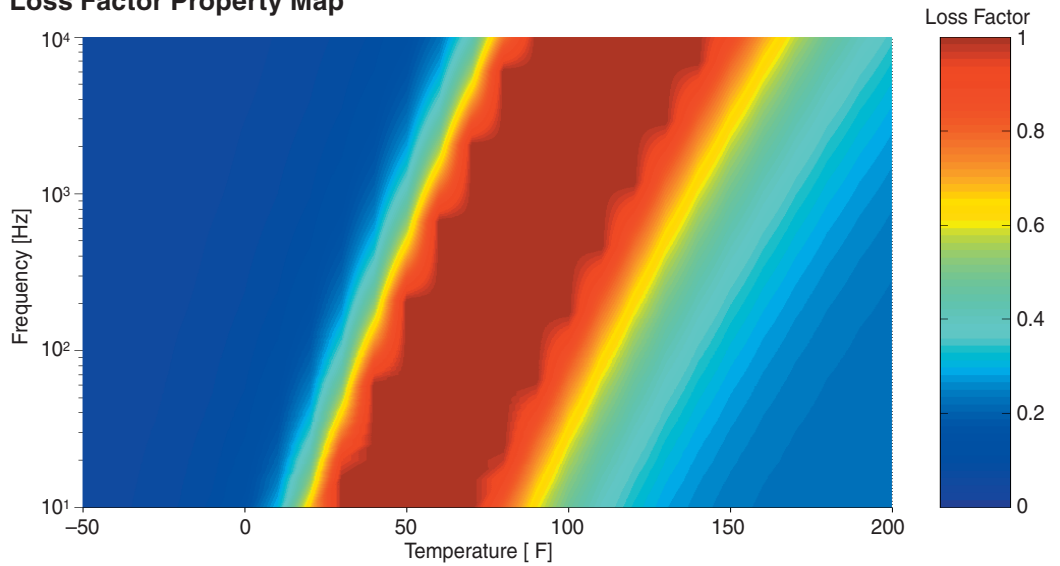

Shear Modulus Property Map

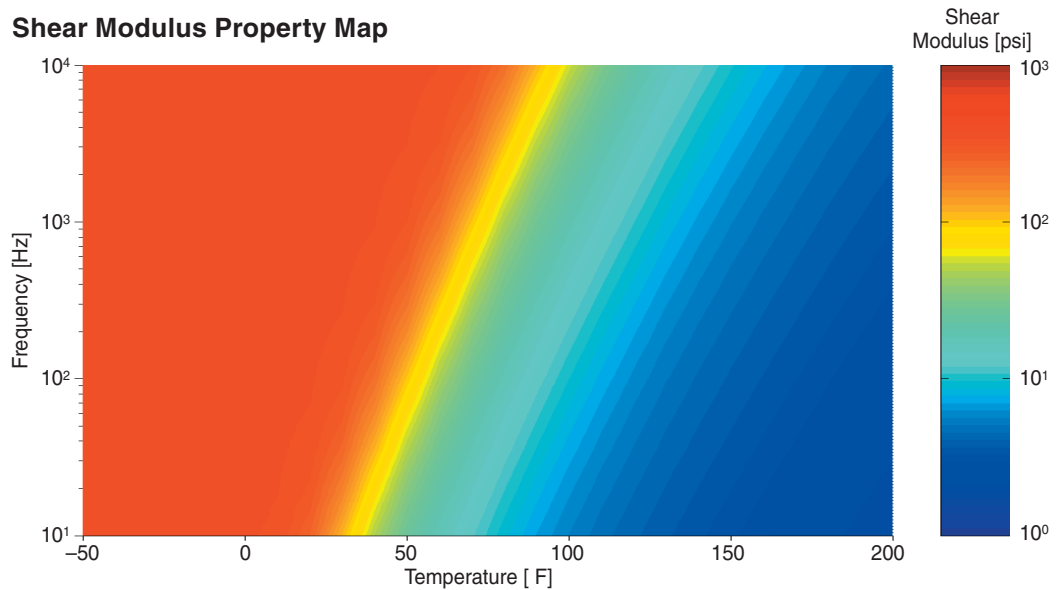

Contact us for a Temperature-Frequency Nomogram.

Full Service Noise and Vibration Control Support

Let Roush assist you with your noise and vibration control activities. We offer a full range of design, engineering, testing, and manufacturing capabilities.

As an alternative to this material, we can search our database of over 3,000 materials to identify other potential material solutions. Once selected, Roush uses design and analyses to optimize the configuration of the material for your specific application.

Roush provides manufacturing operations to convert this material into a finished part that can be delivered to your specifications. Roush has many worldwide partners that provide a wide array of low cost manufacturing processes with high quality production output.

Contact us or visit our website at www.roushind.com/NVH for more detailed information on Roush's full-service capabilities.

Product Performance and Suitability:

All information regarding the use of Roush products identified in this datasheet is believed to be reliable by Roush, but are not product specifications and must only be used as a guide. Roush does not represent or warrant that its products are fit for a particular purpose or that they do not infringe any U.S. or foreign patents. Purchaser must independently determine the suitability of the Roush products for their particular application. Unless written otherwise in Roush's Terms and Conditions of Sale for the product, this datasheet or any verbal statements made by any other distributor, salesman or representative about the product will not be deemed to create an express warranty of any kind.